



QC3265

Quick Check checkweigher

Technical Specification

DESCRIPTION

General

The QC3265 Quick Check checkweigher from Avery Weigh-Tronix, combines rugged stainless steel construction with the proven accuracy of specially designed stainless steel load cells.

The foundation of the Model QC3265 Checkweigher are the patented Avery Weigh-Tronix bases, the industry standard for durability. With added rapid response time, one-stroke setup functions and simplified operation, the QC3265 does just what you need a checkweigher to do: provide fast, accurate checkweighing.

Design

The QC3265 Checkweigher is completely washdown safe and perfect for tough environments. It features stainless steel construction including base, column, load cell and NEMA 4X display enclosure. The standard display housing tilts from vertical to 20 degrees upward.

Features

Two display modes –

- Quick Check – Operates in Weighing Mode with a simple weight display
- Checkweighing – LEDs for Over, Under, and Accept

Simple setup – A single keystroke accomplishes most of the setup functions. Change target values, over and under tolerances, even units of measure in seconds.

Simple operation – Uncluttered display matches the Quick Check's no-nonsense operation. Just three control keys mean short training time and minimal opportunity for human error.

Five units of measure – Select to read in pounds, ounces, kilograms, grams or pounds/ounces for added versatility.

Single load cell design – No moving parts for low maintenance.

NTEP at 3,000d Class III

Proven resistance to washdown

Suitable for food processing environments



SPECIFICATIONS

Environment

14° to 104°F (-10° to 40°C) Water washdown

Agencies

USDA Compliant, NTEP, Canada Weights and Measures
UL, EU Trade Approved, CE

Indicator

Display

LCD: 7-segment, 6-digit, 0.7"
high with 5 decimal point

LED: 7-segment, 6-digit, 0.6" high with 5 decimal point

Power Requirements

Standard default: 115 VAC, ±10% to -15% @ 0.10 Amp
maximum

50/60 Hz, 10 watts max

Power cord length, 6 feet (1.8 meters)

Optional: 230 VAC +10% to -15% @ 0.05 Amp
maximum

50/60 Hz, 15 watts max.

Optional Battery: LCD display only

12 VDC (10 to 15 volts) -

@ 80 mA with 1 load cell

@ 131 mA with 4 load cells

Operational annunciators

Over, Accept, Under, lb, kg, oz, g, lb/oz and
Center Zero

A/D Conversion Rate

60 Hz. Delta-Sigma type converter

Internal resolution

4,718,592 counts per mV/V per second

Excitation for Load Cells

Voltage : 6 volts DC (LCD), 10 volts DC (LED)

Available Current:

LCD: 69 mA (four 350 ohm load cells)

LED: 114 mA (four 350 ohm load cells)

Controls

QUICK CHECK: Toggles between checkweigh mode
and weight display mode

TARGET: Enters target weight

UNITS: Changes enabled units of measure

ZERO: Zero balances the scale

Optional Battery

Available for the LCD version only –
12 volt DC sealed lead acid battery

30 hour battery life

14 hour recharge time

Low battery warning

Low power shutoff

Charging can occur during AC operation



Construction

Stainless steel, NEMA 4X/IP66 enclosure

Calibration and Programming

All calibration and programming is done through the
front panel with data stored in nonvolatile memory.

Display rates

1, 2, 5, or 10* times per second

Filtering

1*, 2, 5, or 10 display intervals

Push Button Zero Range

±1%, ±2%, ±5%, ±10%, ±20%, ±50%, ±100%* of Capacity

Motion Detection Window

d = 1 displayed division

±0.25 d, ±0.5 d, ±0.6 d, ±1 d*, ±2 d, ±3 d, ±5 d

Automatic Zero Tracking

d = 1 displayed division

Window: ±0.25 d, ±0.5 d, ±0.6 d*, ±1 d, ±2 d, ±3, ±5 d,

Rate: 0.1 division per second

Starting Delay: 2 seconds

Over Range Capacity

The scale displays weights up to capacity plus 9
divisions, referenced from the zero value determined
by zero setting point, or 105% of capacity, referenced
from the deadload.

Under Range Capacity

The scale displays weights in the negative direction
using the same restrictions as for over-range, but
further limited by the number of display digits
available.

Temperature Range

-10 to 40°C (14 to 104°F)

-30 to 60°C (-22 to 140°F) with reduced accuracy

Humidity

Up to 100% relative humidity.

Accuracy (indicator)

NTEP Class III 6,000d CC#96-020 (Indicator)

Measurement Canada Cert# AM-5127 (Indicator)

EU Trade Approved (Complete scale)

3,000d EC certificate TAC DK0199.41

Options

- LCD and LED version
- 230 VAC 50/60 Hz power
- Battery and charger
(available with LCD version only)
- RS-232 or RS-485 interface board
- Short and extended towers
- Remote head
- Compact printers



Patented Torsion Bases

The innovative Breakaway Load Transfer System keeps dropped loads and side loads from wrenching the shroud and damaging the loadcell.

Proven 500% overload protection

Torsion assembly in the scale base automatically transfers shock loads and overloads away from the load cell to the scale frame. Scale frame and shroud are all corrosion resistant stainless steel, suitable for food processing environments.

Designed washdown resistant

Tough, easy to clean stainless steel construction makes the scale immune to washdown and changes from hot to cold environments.

Cable

Comes standard with a 10-foot load cell cable

Corner load

100% of scale capacity

Construction

NEMA 4X/IP66 – All-stainless steel structure and load cell

Capacities and increments (* factory default)

Pounds	Ounces	Kilograms	Grams
6 x 0.001	100 x 0.02	3 x 0.0005	3,000 x 0.5
6 x 0.002*	100 x 0.05	3 x 0.001	3,000 x 1
12 x 0.002	200 x 0.05	6 x 0.001	6,000 x 1
12 x 0.005*	200 x 0.1	6 x 0.002	6,000 x 2
30 x 0.005	480 x 0.1	15 x 0.002	15,000 x 2
30 x 0.01*	480 x 0.2	15 x 0.005	15,000 x 5
60 x 0.01	960 x 0.2	30 x 0.005	30,000 x 5
60 x 0.02*	960 x 0.5	30 x 0.01	30,000 x 10
100 x 0.02	1600 x 0.2	50 x 0.01	50,000 x 10
100 x 0.05*	1600 x 0.5	50 x 0.02	50,000 x 20

Scale base dimensions

6-lb and 12-lb scales: 8.75" x 8.75" x 3"
(22 cm x 22 cm x 8)

30-, 60-, and 100-lb scales: 12.25 x 13.75 x 3.25
(31 cm x 35 cm x 8 cm)

Environment

14° to 104°F (-10 to 40°C) Water washdown

Accuracy (base)

NTEP CC# 92-173 class III 3,000 divisions (Base)

Measurement Canada Cert# AM-5557 (Base)

EU Trade Approved (Complete scale)

3,000d EC certificate TAC DK0199.41

Patented Diamond Series Bases

The Diamond Series Base has set a high standard for performance. This tough and dependable design can be counted on for a lifetime of hard work.

Extremely reliable

Single load cell design with no moving parts for low maintenance.

150% overload protection

Rugged overload stops protect scale from excessive loads or dropped objects.

Corner load

100% of scale capacity.

Cable

Comes standard with a 10-foot load cell cable.

Construction

NEMA 4X/IP66 – All-stainless steel structure with encapsulated load cell including four (4) rigidly bolted stainless struts

Capacities and increments

Pounds	Ounces	Kilograms	Grams
100 x 0.02	1600 x 0.5	50 x 0.01	50,000 x 10
200 x 0.05	3200 x 1.0	100 x 0.02	100,000 x 20
500 x 0.1	8000 x 2	220 x 0.05	N/A

Scale base dimensions

100-lb scale: 20" x 20" x 4" (51 cm x 51 cm x 10 cm)

200 & 500-lb scale: 24" x 24" x 4" (61 cm x 61 cm x 10 cm)

Environment

14° to 104°F (-10 to 40°C) Water washdown

Accuracy (base)

NTEP CC# 88-104 III 5,000 divisions (Base)

Measurement Canada Cert# S.WA-3097 (Base)

EU Trade Approved (Complete scale)


3,000d EC certificate TAC DK0199.41

Options (Diamond Series Only)

- Ball-top shroud – Keep product moving. Reduce operator lifting and bending.
- Portable cart – Move the scale easily from site to site. Double the work of a single scale. Constructed of stainless steel, adjustable height, with attached indicator stand.
- Extended cable length – If your application calls for placing the indicator at a remote location.



PHYSICAL SPECIFICATIONS

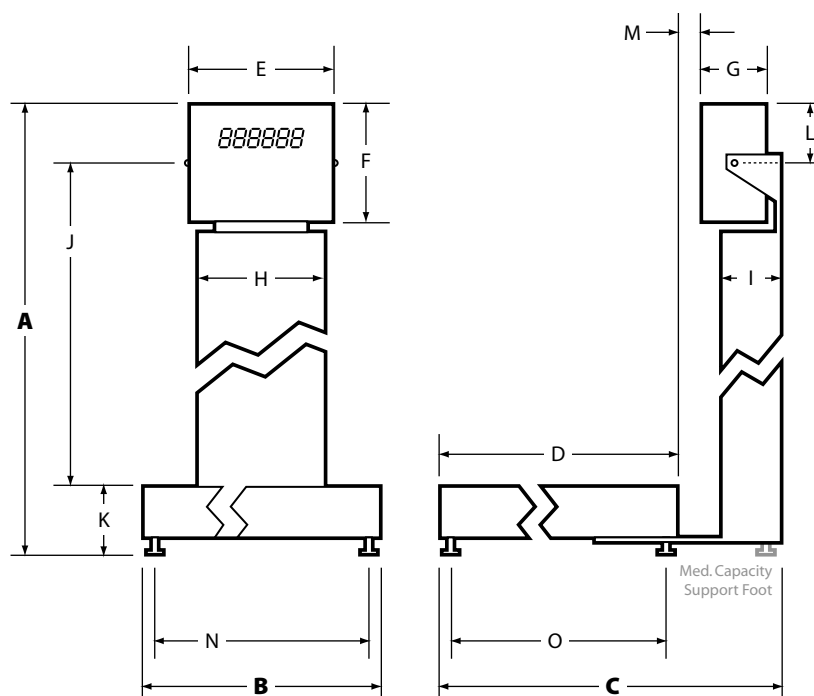

Low Capacity Dimensions

Model	Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
9 x 9 Short Tower	6, 12	10.56	9.09	12.77	8.75	8.25	6.25	3.62	9.09	4.16	3.69	3.06-3.56	3.31	.54	7.85	11.35
9 x 9 Standard Tower	6, 12	18.04	8.75	13.12	8.75	8.25	6.25	3.62	5.25	4.37	11.06	2.81-3.31	3.31	.32	6.95	11.68
9 x 9 Extended Tower	6, 12	24.05	8.75	13.12	8.75	8.25	6.25	3.62	5.25	4.37	17.06	3.06-3.56	3.31	.32	6.95	11.68
12 x 14 Short Tower	30, 60, 100	10.56	13.69	16.12	12.19	8.25	6.25	3.62	9.09	4.16	3.37	3.56-4.06	3.31	.54	11.50	10.00
12 x 14 Standard Tower	30, 60, 100	18.04	13.69	16.46	12.19	8.25	6.25	3.62	5.25	4.37	10.93	3.56-4.06	3.31	.32	11.50	10.00
12 x 14 Extended Tower	30, 60, 100	24.05	13.69	16.46	12.16	8.25	6.25	3.62	5.25	4.37	16.94	3.56-4.06	3.31	.32	11.50	10.00

Medium Capacity Dimensions

Model	Capacity	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
20 x 20 Standard Tower	100, 200	35.00	20.0	26.56	20.00	8.25	6.25	3.62	7.50	3.50	28.02	4.00	3.33	1.62	18.75	18.75
24 x 24 Standard Tower	200, 500	35.00	24.00	30.56	24.00	8.25	6.25	3.62	7.50	3.50	28.02	4.00	3.33	1.62	22.75	22.75

Avery Weigh-Tronix - USA

1000 Armstrong Drive,
Fairmont, MN 56031-1439 USA
usinfo@awtxglobal.com
Toll-Free: (800) 533-0456
Phone: (507) 238-4461

Avery Weigh-Tronix - UK

Foundry Lane, Smethwick,
West Midlands B66 2LP UK
info@awtxglobal.com
Phone: +44 (0) 8453 66 77 88
Fax: +44 (0) 121 224 8183

Please call us or visit www.averyweigh-tronix.com
for your nearest Avery Weigh-Tronix distributor

Avery Weigh-Tronix

